



# KS7

## LIFT

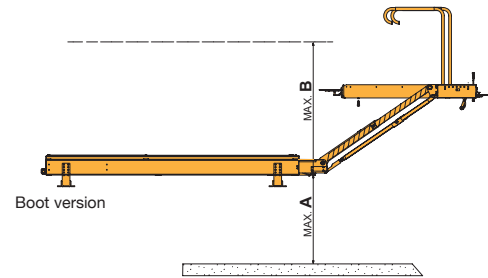

	lift weight	cassette measurement	A (max.)	B (max.)	C (max.)	D (max.)
1200	300 kg	1930x1040x165	450 mm	840 mm	780 mm only stairs	315 mm
1400	320 kg	2040x1040x185	600 mm	900 mm	780 mm (stairs v.) /--(boot v.)	315 mm
1800	410 kg	2300x1080x185	800 mm	1200 mm	only boot	315 mm

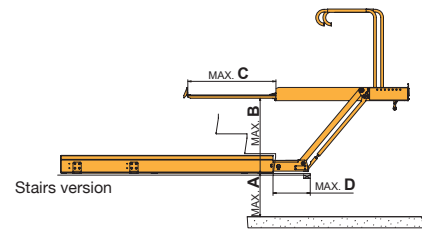

### DESCRIPTION

- Power supply: 24v / max 50 A
- 300 Kg Load capacity.
- According to Regulations: EC2001/85 + DDA + UN R107
- High protective handrails.
- Front and rear protective stops, for a maximum security.

### ADVANTAGES

- Hydraulic cassette lift for urban, intercity vehicles and coaches, with maximal space efficiency.
- Version totally automatic or with manual handrails.
- Available in stairs version or under-floor (boot) version to be installed with dedicated door.
- Different models adaptable to several heights: 1200 - 1400 - 1800
- No need of hydraulic or pneumatic installation. Pump is integrated in the cassette, allowing a plug-and-play easy connection.
- Easy operation by means of a pendant-control
- All movements can be manually operated, in case of lack of supply.