



KS8

WHEELCHAIR UNDER FLOOR LIFT



Features


- Hydraulic lift for motor coaches. Lifts up to 1882mm.
- Designed to be placed under floor of the vehicle placed on the wheel arch or in a luggage compartment.
- Semiautomatic: Automatic barriers / manual handrails.
- Electronic control with fault analysis by blinking light. (CAN bus system)
- Robust and compact design for minimal space requirements.
- Stable and secure platform.
- 2 years warranty (see service manual for details).
- All movements can be manually operated, in case of lack of power supply.

Advantages

- Easy to install. Hydraulic unit is integrated in the lift, allowing a plug-and-play connection.
- Easy operation by means of a hand-held control.
- Optional support guides to extract the lift and facilitate maintenance tasks.

Safety

- High protective handrails.
- Detector of unfolded handrails.
- Automatic inner roll stop (bridging device).
- Automatic hydraulic outer stop barrier for maximal safety.
- Audible warning device.
- Pressure device to detect platform occupancy at stowing.

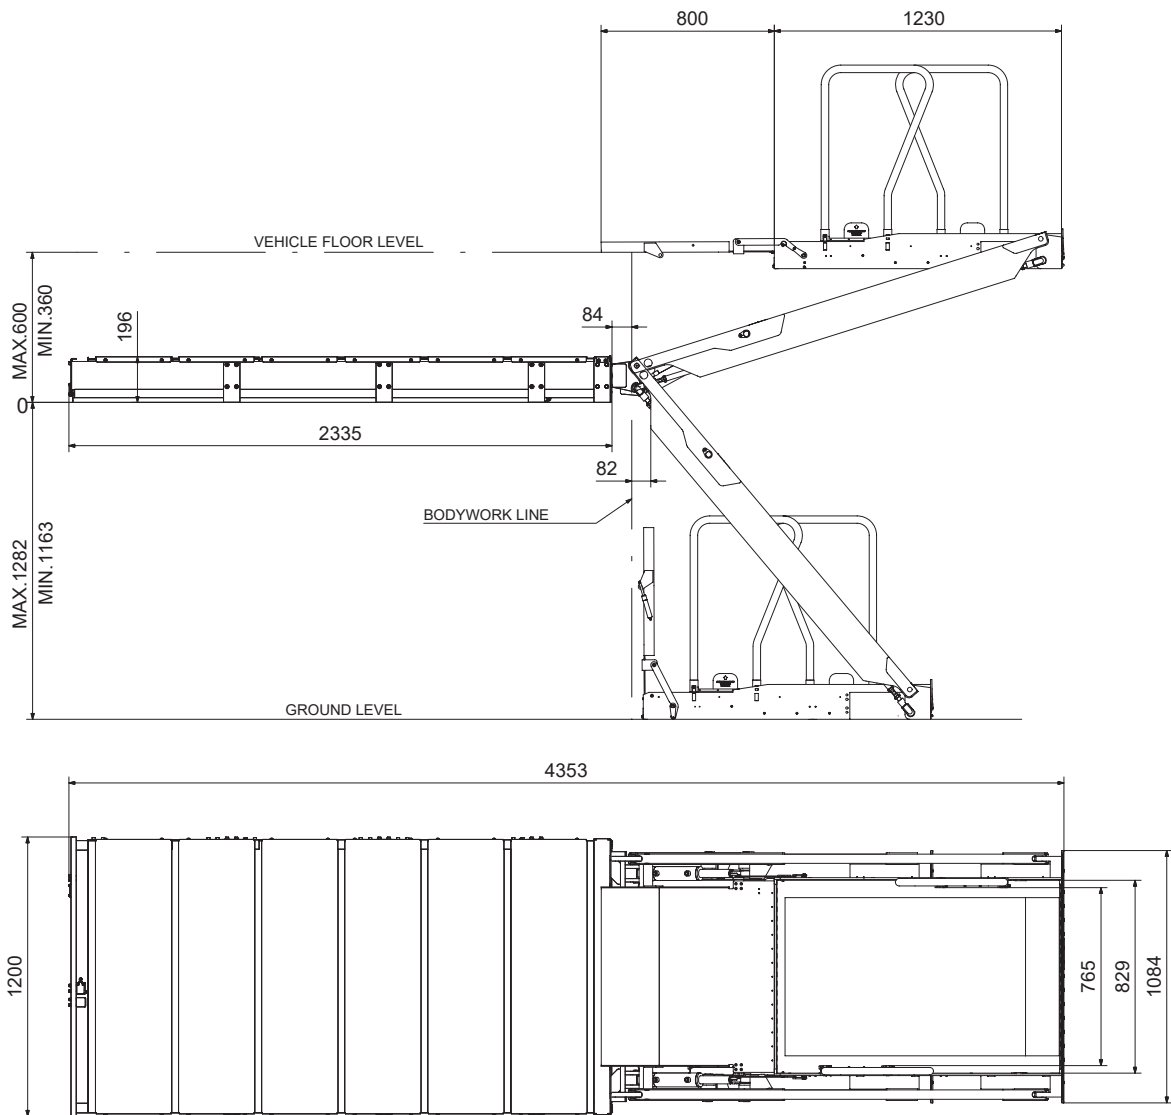

Standard version Technical features

- Maximal load: 350 kg
- Lift standard weight: 464 kg
- High resistance steel
- Power supply: 24V / max 50A
- According to Regulations: R107, DDA

US version Technical features

- Maximal load: 272 kg (600 lb)
- Lift standard weight: 464 kg (1023 lb)
- High resistance steel
- Power supply: 24V / max 50A
- According to Regulations: NHTSA 403/404 Compliant DOT_Public Use
- Optional: supply of threshold warning system through acoustic and lighting alert.