


# 028b

## INTEGRATED SLIDING DOOR 1 LEAF electrical

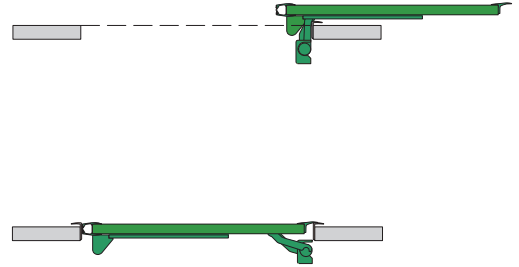

### DESCRIPTION

- Version for 1 leaf doors.
- Electric drive version 24v.
- Pneumatic emergency as standard.
- Sensitization by electronic control and power sensitive rubber.
- Emergency system buttons.
- Cancellation emergency vehicle speed > 3 km / h.

### TECHNICAL DATA

- Minimum pressure 6 bar.
- Temperature -30C + 70C work
- Nominal voltage 24v ± 25%
- Displacement to the outside: 85mm.
- Doorway Width: 770mm, 850mm and 1000mm.
- Net opening: 650mm, 730mm and 880mm
- Complies UN regulations R107.
- Vehicles destined for Class I, II, A.

### ADVANTAGES

- Easy to install and regulate.
- Fast sliding door with arm-subjection.
- Simple mechanism that is integrated configuration ceiling. Electronics is adjustable to the requirements of customers. Masats be parameterized electronic / programmable.
- Designed to be installed optionally with the Masats CAN-MCP system.
- It does not require door lock.
- Height and curvature adapted to the vehicle.
- Fully glazed leaf, single crystal (optional double).