


KS7b2

LIFT Boot version



	lift weight	cassette measurement	A (max.)	B (max.)	C (max.)
1800	391 kg	2.300x1.074x190	800 mm	1.200 mm	380 mm

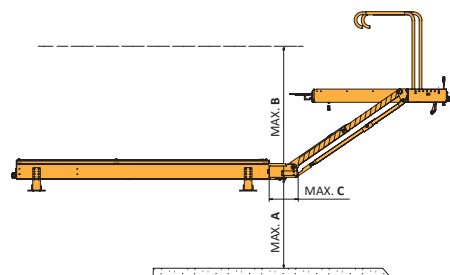

DESCRIPTION

- Power supply: 24v / max 50 A
- 350 Kg Load capacity.
- According to Regulations: EC2001/85 + DDA + UN R107 + R118
- Protective handrails.
- Front and rear protective stops, for a maxima security.



ADVANTAGES

- Hydraulic cassette lift designed for urban, intercity, and coach vehicles, ensuring optimal space efficiency.
- Available in a fully automatic version or with manually operated handrails.
- Installed below the floor (luggage compartment) with a dedicated door.
- No need for external hydraulic or pneumatic installation. The pump is integrated within the cassette, enabling a straightforward plug-and-play setup.
- Simple and intuitive operation through a pendant control.
- All functions can be manually operated in case of power supply interruption.